



The PB4060 L/R parking barrier is an ideal automatic car park barrier for parking lot and security control.

The ZKTeco parking product range does not only offer long-life cycle, reliability and quality. Furthermore, based on the extraordinary structural design, the device has a compact size, excellent waterproof dustproof performance and low noise operation. Also it greatly reduces the difficulty of equipment maintenance that effectively reduces the operation cost of the user.


## **Features**

- The modularly designed housing made of powder coated steel offers best protection against corrosion.
- The compact structure design is convenient for packing and saving transportation cost.
- Simple installation; it is only necessary to screw the equipment on the ground and connect the electricity.
- Abundant production strength, provide mass customization service.

## **Specifications**

Lane width	6m
Opening / closing time	6s
Supply voltage	110V AC or 220V AC
Power consumption max.	120W
Frequency	50- 60Hz
Cabinet material	powder coated steel
Boom material	aluminum alloy
Temperature range	-20 °C ~ +60 °C
Humidity range	≤90%
Housing dimensions ( $W \times D \times H$ )	328 * 286 * 934 (mm)
Packing dimensions (W x D x H)	460 * 420 * 1150 (mm)
Net weight (without boom)	60kg
Gross weight (without boom)	70kg

## **Dimensions**

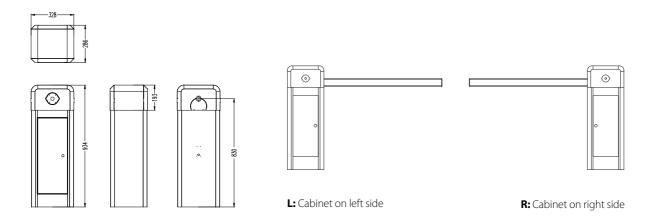

## **Typical Installation**

